

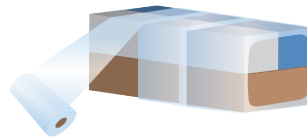


SPINNER 1000 S

MEMBRANE, ACRYLIC AND LACQUER PAINTED COVERS - BATHROOMS AND KITCHEN CABINETS - DOORS - DOOR FRAMES AND MOULDINGS
LAMINATE FLOORING - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES - PVC PROFILE PRODUCTS ETC.

Ask for details

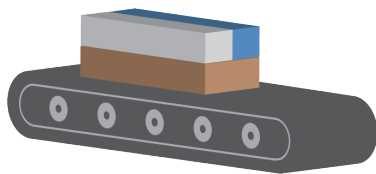

HORIZONTAL STRETCH FILM WRAPPING SERIES

TECHNICAL FEATURES

PRODUCT TO WRAP SIZES

Max. Length		Unlimited		
Min. Dimensions (W x H x L)	mm/inch	100 x 18 x 600*	$3^{15}/_{16}$ '' x $45^{11}/_{64}$ '' x $23^5/_8$ ''	* With Short Part Nail

CONVEYOR BELT'S FEATURES

Useful Length	mm/inch	1924	$75^3/_6$ ''
Total Length	mm/inch	2000	$78^{47}/_{64}$ ''
Working Height	mm/inch	915	$36^1/_32$ ''
Electric Motor Power	kW	0,55	
Max. Conveyor Speed	meter/min.	12	
Max. Load Capacity	kgs/meter	100	

STRETCH FILM FEATURES

Max. Width	mm/inch	170	$6^{11}/_{16}$ ''	
Max. Diameter	mm/inch	Ø 230	$9^1/_16$ ''	(Max. Weight: 3 kg)
Reel Core Diameter	mm/inch	Ø 76	$2^{63}/_{64}$ ''	
Recommended Thickness	micron	23, 30, 35		

MACHINE GENERAL FEATURES

Main Motor Power	kW	1,5	
Max. Ring Rotation Speed	rpm	85	
Min. Ring Rotation Speed	rpm	20	
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G	
Total Power	kW	2,7	
Standard Machine Dimensions (W x H x L)	mm/inch	2191 x 2341 x 4271	$86^{17}/_{64}$ '' x $92^{11}/_{64}$ '' x $168^5/_32$ ''
Total Weight	kg	980	

* 208 Volt, 380 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)

