
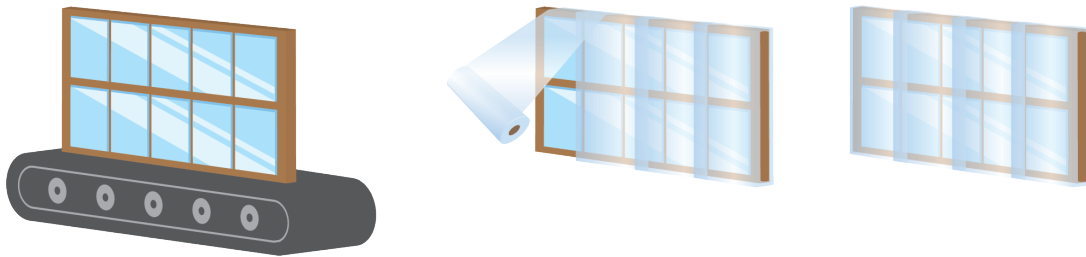


# FRAMEWRAP 1500 S

ALUMINIUM, STEEL, PVC PANELS AND FRAMES - BED BASES - MEMBRANE, ACRYLIC AND LACQUER PAINTED COVERS - DOORS

Ask for details

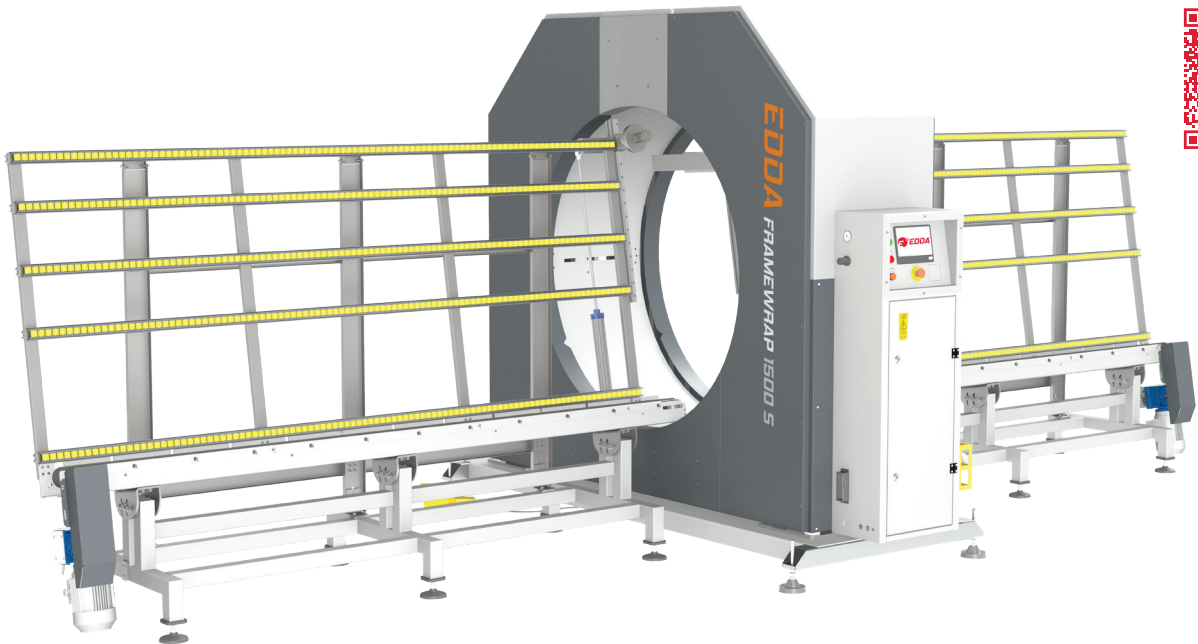

HORIZONTAL STRETCH FILM WRAPPING SERIES

## TECHNICAL FEATURES

### PRODUCT TO WRAP SIZES

Max. Length		Unlimited		
Max. Width x Max. Height	mm/inch	150 x 1200	$5\frac{29}{32}'' \times 47\frac{1}{4}''$	* With Short Part Nail
Min. Dimensions (W x H x L)	mm/inch	40 x 500 x 750*	$1\frac{37}{64}'' \times 19\frac{11}{16}'' \times 29\frac{17}{32}''$	

### CONVEYOR BELT'S FEATURES

Useful Length	mm/inch	2950	$116\frac{9}{32}''$
Total Length	mm/inch	2953	$116\frac{17}{64}''$
Working Height	mm/inch	620	$24\frac{13}{32}''$
Electric Motor Power	kW	0,55	
Max. Conveyor Speed	meter/min.	12	
Max. Load Capacity	kgs/meter	100	

### STRETCH FILM FEATURES

Max. Width	mm/inch	250	$9\frac{27}{32}''$	
Max. Diameter	mm/inch	Ø 230	$9\frac{1}{16}''$	(Max. Weight: 4,5 kg)
Reel Core Diameter	mm/inch	Ø 76	$2\frac{63}{64}''$	
Recommended Thickness	micron	23, 30, 35		

### MACHINE GENERAL FEATURES

Main Motor Power	kW	2,2	
Max. Ring Rotation Speed	rpm	85	
Min. Ring Rotation Speed	rpm	20	
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G	
Total Power	kW	3,5	
Standard Machine Dimensions (W x H x L)	mm/inch	2740 x 2359 x 6451	$107\frac{7}{8}'' \times 92\frac{7}{8}'' \times 253\frac{31}{32}''$
Total Weight	kg	1250	

\* 208 Volt, 380 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)