
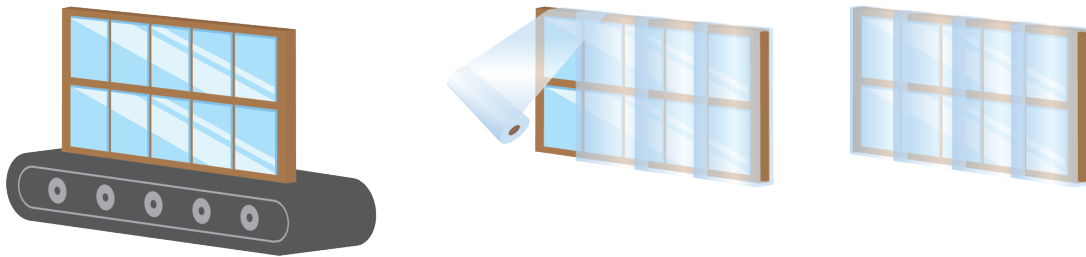


FRAMEWRAP 2200 S

ALUMINIUM, STEEL, PVC PANELS AND FRAMES - BED BASES - MEMBRANE, ACRYLIC AND LACQUER PAINTED COVERS - DOORS

Ask for details

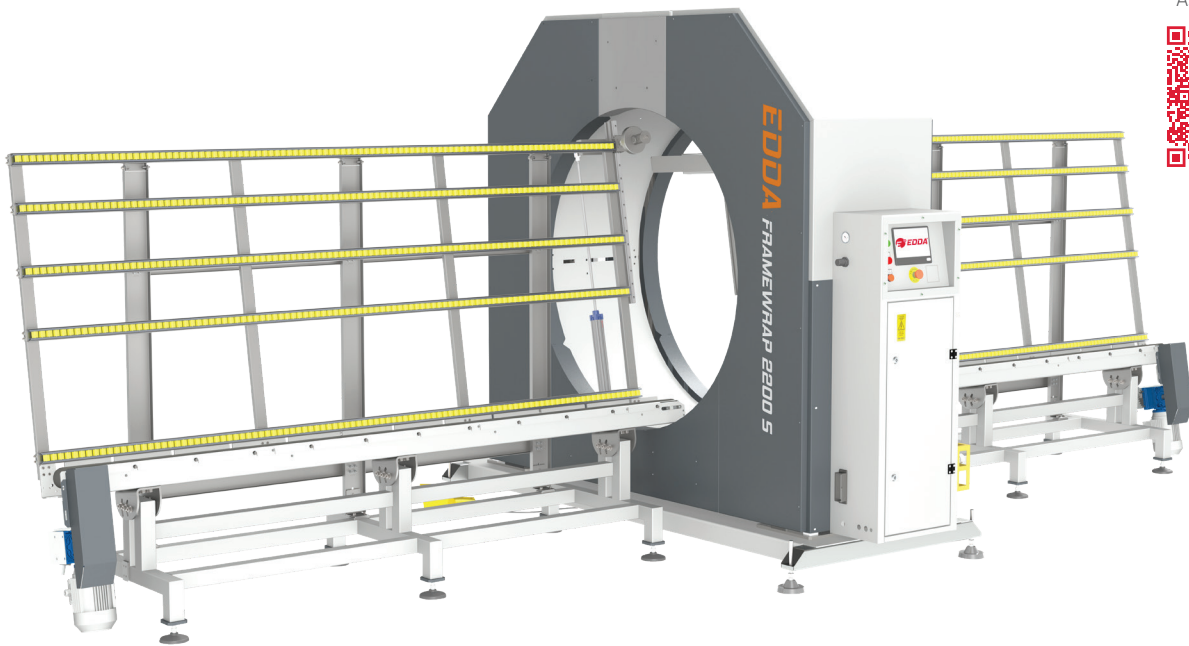

TECHNICAL FEATURES

PRODUCT TO WRAP SIZES

Max. Length		Unlimited		
Max. Width x Max. Height	mm/inch	150 x 2050	$5^{29}/_{32}$ " x $80^{45}/_{64}$ "	* With Short Part Nail
Min. Dimensions (W x H x L)	mm/inch	40 x 900 x 1200*	$1^{37}/_{64}$ " x $37^{1}/_{16}$ " x $47^{1}/_{4}$ "	

CONVEYOR BELT'S FEATURES

Useful Length	mm/inch	2950	$116^{9}/_{64}$ "
Total Length	mm/inch	2953	$116^{17}/_{64}$ "
Working Height	mm/inch	620	$24^{13}/_{32}$ "
Electric Motor Power	kW	0,55	
Max. Conveyor Speed	meter/min.	12	
Max. Load Capacity	kgs/meter	100	

STRETCH FILM FEATURES

Max. Width	mm/inch	500	$19^{11}/_{16}$ "	
Max. Diameter	mm/inch	Ø 250	$9^{27}/_{32}$ "	(Max. Weight: 9 kg)
Reel Core Diameter	mm/inch	Ø 76	$2^{63}/_{64}$ "	
Recommended Thickness	micron	23, 30, 35		

MACHINE GENERAL FEATURES

Main Motor Power	kW	4,4	
Max. Ring Rotation Speed	rpm	35	
Min. Ring Rotation Speed	rpm	10	
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G	
Total Power	kW	5,6	
Standard Machine Dimensions (W x H x L)	mm/inch	3450 x 3150 x 6750	$135^{53}/_{64}$ " x $124^{1}/_{64}$ " x $265^{3}/_{4}$ "
Total Weight	kg	2050	

* 208 Volt, 380 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)

HORIZONTAL STRETCH FILM WRAPPING SERIES