


CROSSWRAP 1500 S

COMPATIBLE WITH ALL KIND OF CIRCULAR SHAPES (VEHICLE WHEELS - VEHICLE RIMS -HOSE PIPE - ELECTRICAL CABLE ETC.)



Ask for details

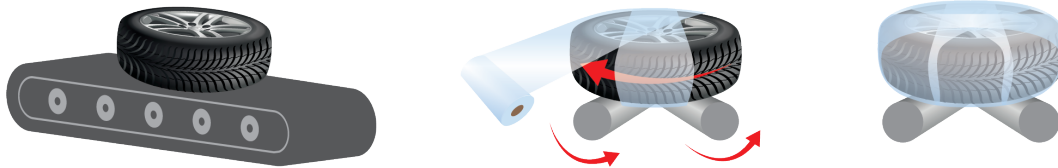

TECHNICAL FEATURES

PRODUCT TO WRAP SIZES

Max. Length		Unlimited	
Max. Width x Max. Height	mm/inch	Ø 950 x 800	Ø 37 ¹³ / ₃₂ " x 31 ¹ / ₂ "
Min. Dimensions (W x H x L)	mm/inch	Ø 650 x 18	Ø 25 ¹⁹ / ₃₂ " x 4 ⁵ / ₆₄ "

CONVEYOR BELT'S FEATURES

Useful Length	mm/inch	1300	51 ³ / ₁₆ "
Total Length	mm/inch	1350	53 ⁹ / ₃₂ "
Working Height	mm/inch	950	37 ¹³ / ₃₂ "
Electric Motor Power	kW	0,55	
Max. Conveyor Speed	meter/min.	12	
Max. Load Capacity	kgs/meter	100	

STRETCH FILM FEATURES

Max. Width	mm/inch	250	9 ²⁷ / ₃₂ "	
Max. Diameter	mm/inch	Ø 230	9 ¹ / ₁₆ "	(Max. Weight: 4,5 kg)
Reel Core Diameter	mm/inch	Ø 76	2 ⁶³ / ₆₄ "	
Recommended Thickness	micron	23, 30, 35		

MACHINE GENERAL FEATURES

Main Motor Power	kW	2,2	
Max. Ring Rotation Speed	rpm	60	
Min. Ring Rotation Speed	rpm	20	
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G	
Total Power	kW	3,9	
Standard Machine Dimensions (W x H x L)	mm/inch	2575 x 3115 x 3325	101 ³ / ₈ " x 122 ⁴¹ / ₆₄ " x 130 ²⁹ / ₃₂ "
Total Weight	kg	1375	

* 208 Volt, 380 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)

HORIZONTAL STRETCH FILM WRAPPING SERIES