


# SPINNER 450 S BN

DOOR FRAMES AND MOULDINGS - LAMINATE FLOORING - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES PVC PROFILE PRODUCTS ETC.

Ask for details

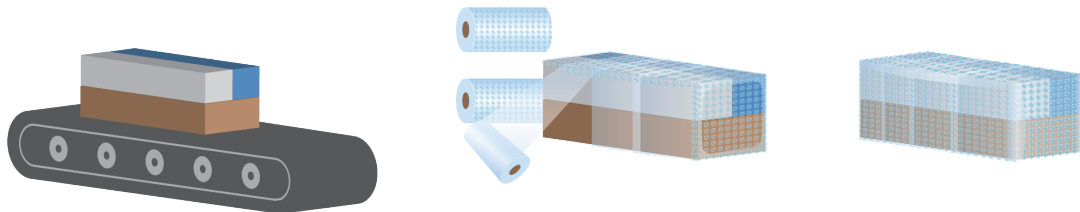

TOTAL CLOSING SERIES

## TECHNICAL FEATURES

### PRODUCT TO WRAP SIZES

Max. Length	Unlimited		
Min. Dimensions (W x H x L)	mm/inch	100 x 18 x 600*	3 <sup>15</sup> / <sub>16</sub> " x 4 <sup>5</sup> / <sub>64</sub> " x 23 <sup>5</sup> / <sub>8</sub> " * With Short Part Nail

### CONVEYOR BELT'S FEATURES

Useful Length	mm/inch	1820	71 <sup>21</sup> / <sub>32</sub> "
Total Length	mm/inch	2000	78 <sup>67</sup> / <sub>64</sub> "
Working Height	mm/inch	901	35 <sup>15</sup> / <sub>32</sub> "
Electric Motor Power	kW	0,55	
Max. Conveyor Speed	meter/min.	15	
Max. Load Capacity	kgs/meter	100	

### AIR BUBBLE FILM UNIT

Max. Film Width	mm/inch	450	17 <sup>23</sup> / <sub>32</sub> "
Max. Film Reel Diameter	mm/inch	Ø500	19 <sup>11</sup> / <sub>16</sub> "
Reel Core Diameter	mm/inch	Ø20 - Ø76	2 <sup>5</sup> / <sub>32</sub> " - 2 <sup>63</sup> / <sub>64</sub> "
Cutting & Welding System	°C	50 - 150	
Suitable Film Materials	PE Film, PE Air Bubble Film, PVC Film		

### STRETCH FILM FEATURES

Max. Width	mm/inch	170	6 <sup>11</sup> / <sub>16</sub> "
Max. Diameter	mm/inch	Ø 230	9 <sup>1</sup> / <sub>16</sub> "
Reel Core Diameter	mm/inch	Ø 76	2 <sup>63</sup> / <sub>64</sub> "
Recommended Thickness	micron	23, 30, 35	

(Max. Weight: 3 kg)

### MACHINE GENERAL FEATURES

Main Motor Power	kW	1,1
Max. Ring Rotation Speed	rpm	160
Min. Ring Rotation Speed	rpm	40
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G
Total Power	kW	2,95
Standard Machine Dimensions (W x H x L)	mm/inch	1571 x 2089 x 4195
Total Weight	kg	800

\* 208 Volt, 380 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)