
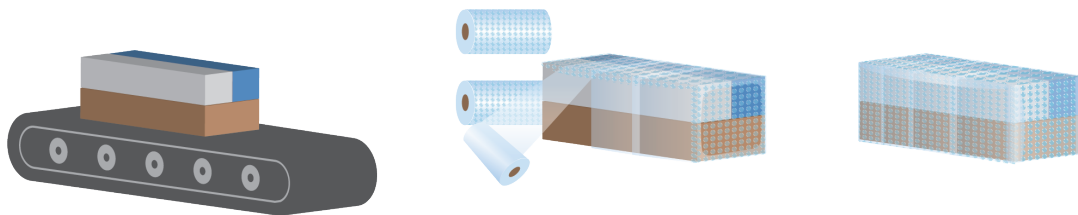


# SPINNER 1000 S BN

MEMBRANE, ACRYLIC AND LACQUER PAINTED COVERS - BATHROOMS AND KITCHEN CABINETS - DOORS - DOOR FRAMES AND MOULDINGS  
LAMINATE FLOORING - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES - PVC PROFILE PRODUCTS ETC.

Ask for details

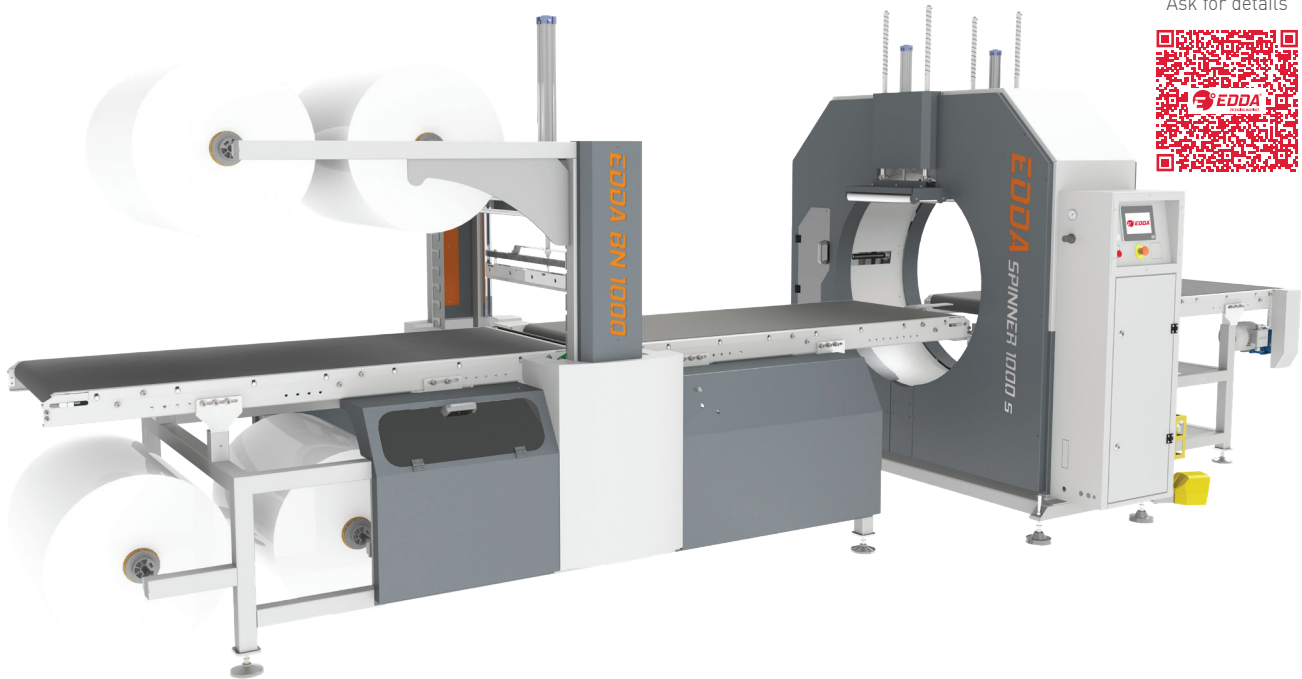

TOTAL CLOSING SERIES

## TECHNICAL FEATURES

### PRODUCT TO WRAP SIZES

Max. Length	Unlimited		
Min. Dimensions (W x H x L)	mm/inch	100 x 18 x 600*	31 <sup>5</sup> / <sub>16</sub> " x 4 <sup>5</sup> / <sub>16</sub> " x 23 <sup>5</sup> / <sub>8</sub> " * With Short Part Nail

### CONVEYOR BELT'S FEATURES

Useful Length	mm/inch	1924	75 <sup>3</sup> / <sub>16</sub> "
Total Length	mm/inch	2000	78 <sup>47</sup> / <sub>64</sub> "
Working Height	mm/inch	915	36 <sup>1</sup> / <sub>2</sub> "
Electric Motor Power	kW	0,55	
Max. Conveyor Speed	meter/min.	12	
Max. Load Capacity	kgs/meter	100	

### AIR BUBBLE FILM UNIT

Max. Film Width	mm/inch	800	31 <sup>1</sup> / <sub>32</sub> "
Max. Film Reel Diameter	mm/inch	Ø600	23 <sup>3</sup> / <sub>16</sub> "
Reel Core Diameter	mm/inch	Ø20 - Ø76	2 <sup>5</sup> / <sub>32</sub> " ~ 2 <sup>63</sup> / <sub>64</sub> "
Cutting & Welding System	°C	50 - 150	
Operating Temperature			
Suitable Film Materials		PE Film, PE Air Bubble Film, PVC Film	

### STRETCH FILM FEATURES

Max. Width	mm/inch	170	6 <sup>11</sup> / <sub>16</sub> "	
Max. Diameter	mm/inch	Ø 230	9 <sup>1</sup> / <sub>16</sub> "	(Max. Weight: 3 kg)
Reel Core Diameter	mm/inch	Ø 76	2 <sup>63</sup> / <sub>64</sub> "	
Recommended Thickness	micron	23, 30, 35		

### MACHINE GENERAL FEATURES

Main Motor Power	kW	1,5	
Max. Ring Rotation Speed	rpm	85	
Min. Ring Rotation Speed	rpm	20	
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G	
Total Power	kW	3,75	
Standard Machine Dimensions (W x H x L)	mm/inch	2191 x 2441 x 6362	86 <sup>17</sup> / <sub>64</sub> " x 96 <sup>7</sup> / <sub>64</sub> " x 250 <sup>15</sup> / <sub>32</sub> "
Total Weight	kg	1320	

\* 208 Volt, 380 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)