
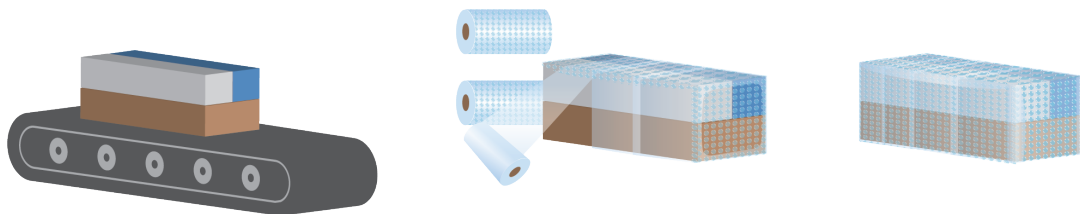


# SPINNER 1500 S BN

BEDROOM FURNITURE - BED BASES - MEMBRANE, ACRYLIC AND LACQUER PAINTED COVERS - BATHROOMS AND KITCHEN CABINETS - DOORS  
DOOR FRAMES AND MOULDINGS - LAMINATE FLOORING - SANDWICH PANELS - WOOD PANELS - ALUMINIUM, STEEL AND WOOD PROFILES AND  
PIPES PVC PROFILE PRODUCTS ETC.

Ask for details

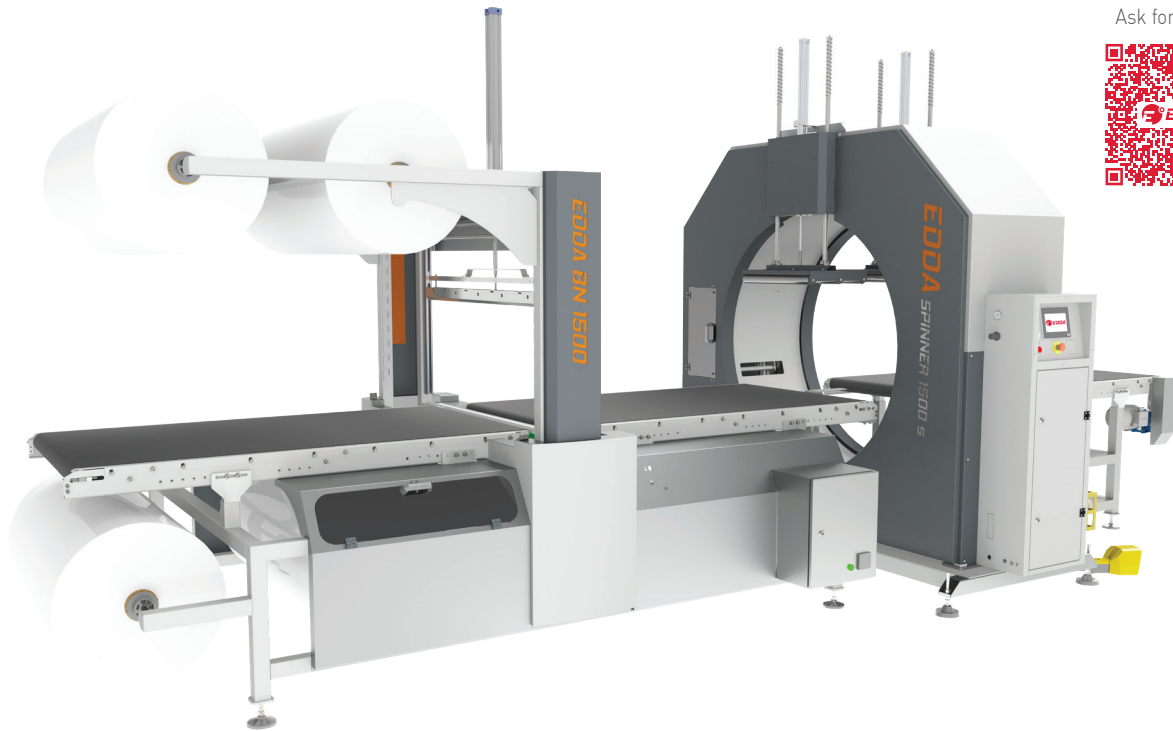

## TECHNICAL FEATURES

### PRODUCT TO WRAP SIZES

Max. Length		Unlimited	
Min. Dimensions (W x H x L)	mm/inch	200 x 18 x 700*	7 <sup>7</sup> / <sub>8</sub> '' x 4 <sup>5</sup> / <sub>64</sub> '' x 27 <sup>9</sup> / <sub>16</sub> '' * With Short Part Nail

### CONVEYOR BELT'S FEATURES

Useful Length	mm/inch	1924	75 <sup>3</sup> / <sub>4</sub> ''
Total Length	mm/inch	2000	78 <sup>67</sup> / <sub>64</sub> ''
Working Height	mm/inch	900	35 <sup>7</sup> / <sub>16</sub> ''
Electric Motor Power	kW	0,55	
Max. Conveyor Speed	meter/min.	10	
Max. Load Capacity	kgs/meter	100	

### AIR BUBBLE FILM UNIT

Max. Film Width	mm/inch	1350	53 <sup>5</sup> / <sub>32</sub> ''
Max. Film Reel Diameter	mm/inch	Ø600	23 <sup>5</sup> / <sub>16</sub> ''
Reel Core Diameter	mm/inch	Ø20 - Ø76	2 <sup>5</sup> / <sub>32</sub> '' - 2 <sup>63</sup> / <sub>64</sub> ''
Cutting & Welding System			
Operating Temperature	°C	50 - 150	
Suitable Film Materials		PE Film, PE Air Bubble Film, PVC Film	

### STRETCH FILM FEATURES

Max. Width	mm/inch	250	9 <sup>27</sup> / <sub>32</sub> ''
Max. Diameter	mm/inch	Ø 230	9 <sup>1</sup> / <sub>16</sub> '' (Max. Weight: 4,5 kg)
Reel Core Diameter	mm/inch	Ø 76	2 <sup>63</sup> / <sub>64</sub> ''
Recommended Thickness	micron	23, 30, 35	

### MACHINE GENERAL FEATURES

Main Motor Power	kW	2,2
Max. Ring Rotation Speed	rpm	60
Min. Ring Rotation Speed	rpm	15
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G
Total Power	kW	5,4
Standard Machine Dimensions (W x H x L)	mm/inch	2741 x 2882 x 6532
Total Weight	kg	1700

\* 208 Volt, 380 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)

TOTAL CLOSING SERIES