
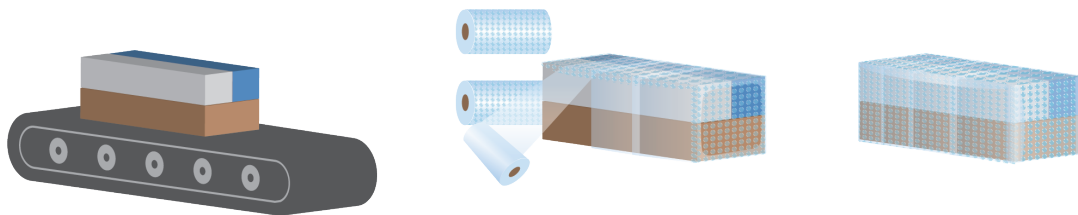


# SPINNER 1800 S BN

SOFAS - PALLETS - BED BASES - BEDROOM AND KITCHEN CABINETS - SANDWICH PANELS - WOOD PANELS - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES - PVC PROFILE PRODUCTS ETC.

Ask for details

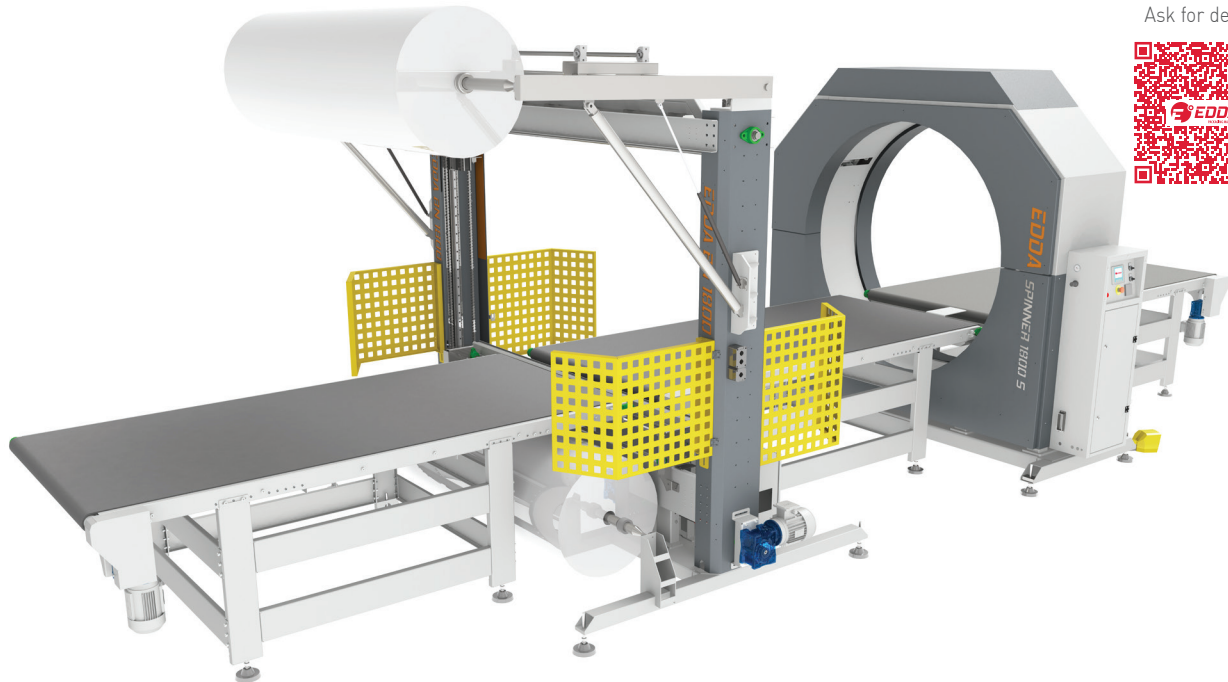

TOTAL CLOSING SERIES

## TECHNICAL FEATURES

### PRODUCT TO WRAP SIZES

Max. Length	Unlimited		
Min. Dimensions (W x H x L)	mm/inch	700 x 200 x 1000*	27 <sup>9</sup> / <sub>16</sub> " x 7 <sup>7</sup> / <sub>8</sub> " x 39 <sup>3</sup> / <sub>8</sub> "

\* With Short Part Nail

### CONVEYOR BELT'S FEATURES

Useful Length	mm/inch	2680	105 <sup>33</sup> / <sub>64</sub> "
Total Length	mm/inch	2910	114 <sup>9</sup> / <sub>16</sub> "
Working Height	mm/inch	950	37 <sup>131</sup> / <sub>52</sub> "
Electric Motor Power	kW	0,55	
Max. Conveyor Speed	meter/min.	12	
Max. Load Capacity	kgs/meter	100	

### AIR BUBBLE FILM UNIT

Max. Film Width	mm/inch	2000	78 <sup>47</sup> / <sub>64</sub> "
Max. Film Reel Diameter	mm/inch	Ø650	25 <sup>19</sup> / <sub>32</sub> "
Reel Core Diameter	mm/inch	Ø20 - Ø76	2 <sup>5</sup> / <sub>32</sub> " - 2 <sup>63</sup> / <sub>64</sub> "
Cutting & Welding System	°C	50 - 150	
Operating Temperature			
Suitable Film Materials		PE Film, PE Air Bubble Film, PVC Film	

### STRETCH FILM FEATURES

Max. Width	mm/inch	250	9 <sup>27</sup> / <sub>32</sub> "
Max. Diameter	mm/inch	Ø 230	9 <sup>1</sup> / <sub>16</sub> "
Reel Core Diameter	mm/inch	Ø 76	2 <sup>63</sup> / <sub>64</sub> "
Recommended Thickness	micron	23, 30, 35	

(Max. Weight: 4,5 kg)

### MACHINE GENERAL FEATURES

Main Motor Power	kW	3
Max. Ring Rotation Speed	rpm	50
Min. Ring Rotation Speed	rpm	10
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G
Total Power	kW	8,35
Standard Machine Dimensions (W x H x L)	mm/inch	3242 x 3009 x 9191
Total Weight	kg	2600

\* 208 Volt, 380 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)