


ALFA SERIES

FOOD & BEVERAGES - PERSONAL CARE - INDUSTRIAL & HOUSEHOLD - MANUFACTURING INDUSTRY - LOGISTICS - HEALTHCARE - BAKERY
 CERAMIC INDUSTRY - AUTOMOTIVE - CONSUMER GOODS

Ask for details

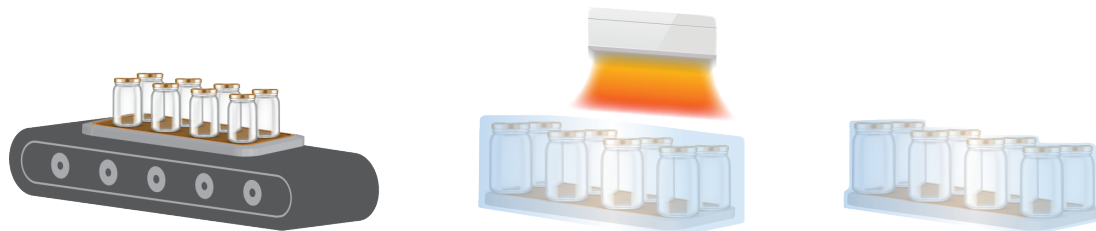

POF SHRINK SERIES

TECHNICAL FEATURES

PRODUCT TO WRAP SIZES		ALFA 500		ALFA 650	
Max. Height (H)	mm/inch	150	5 ²⁹ / ₃₂ ''	150	5 ²⁹ / ₃₂ ''
Max. Dimensions (L x W x H)	mm/inch	Unlimited x 350 x 150	Unlimited x 13 ²⁵ / ₃₂ '' x 5 ²⁹ / ₃₂ ''	Unlimited x 500 x 150	Unlimited x 19 ¹¹ / ₁₆ '' x 5 ²⁹ / ₃₂ ''
FILM FEATURES					
Max. Width	mm/inch	600	23 ⁵ / ₈ ''	750	29 ¹⁷ / ₃₂ ''
Max. Diameter	mm/inch	Ø 30	1 ³ / ₁₆ ''	Ø 30	1 ³ / ₁₆ ''
Recommended Thickness	micron	10, 30		10, 30	
MACHINE GENERAL FEATURES					
Machine Dimension	mm/inch	4500 x 1500 x 1400 (h)	177 ¹¹ / ₆₄ '' x 59 ¹ / ₁₆ '' x 55 ¹ / ₈ '' (h)	4500 x 1680 x 1400 (h)	177 ¹¹ / ₆₄ '' x 66 ³ / ₆₄ '' x 55 ¹ / ₈ '' (h)
Vertical Jaw Length	mm/inch	470	18 ¹ / ₂ ''	650	25 ¹⁹ / ₃₂ ''
Capacity (Depends On Product Dimension)	PKG/min.	100 (Max.)		60 (Max.)	
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G		380 Volt - 50/60 Hz - 3P+1N+1G	
Power	kW	5		5	
Power (Incl. Heat Tunnel)	kW	15		18	
Max. Jaw Height	mm/inch	180	7 ³ / ₃₂ ''	180	7 ³ / ₃₂ ''

* 208 Volt, 380 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)