


ADMIRAL SERIES

FOOD & BEVERAGES - PERSONAL CARE - INDUSTRIAL & HOUSEHOLD - MANUFACTURING INDUSTRY - LOGISTICS - HEALTHCARE - BAKERY
CERAMIC INDUSTRY - AUTOMOTIVE - CONSUMER GOODS

Ask for details

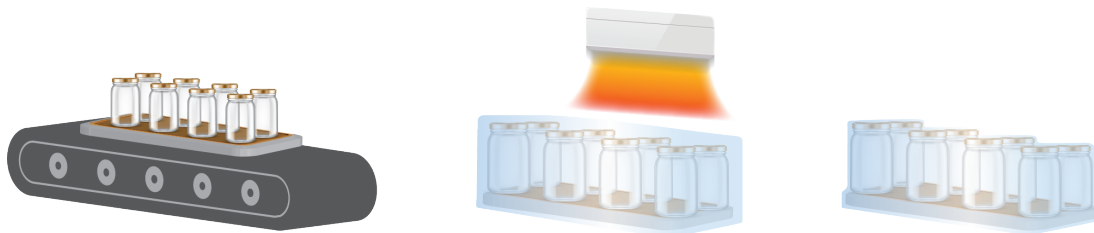

POF SHRINK SERIES

TECHNICAL FEATURES

PRODUCT TO WRAP SIZES		ADMIRAL 850		ADMIRAL 950	
Max. Height (H)	mm/inch	150	5 ²⁹ / ₃₂ ''	150	5 ²⁹ / ₃₂ ''
Max. Dimensions (L x W x H)	mm/inch	Unlimited x 750 x 150	Unlimited x 29 ¹⁷ / ₃₂ '' x 5 ²⁹ / ₃₂ ''	Unlimited x 850 x 150	Unlimited x 33 ¹⁵ / ₃₂ '' x 5 ²⁹ / ₃₂ ''
FILM FEATURES					
Max. Width	mm/inch	950	37 ¹³ / ₃₂ ''	1100	43 ⁵ / ₁₆ ''
Max. Diameter	mm/inch	Ø 30	1 ³ / ₁₆ ''	Ø 30	1 ³ / ₁₆ ''
Recommended Thickness	micron	10, 30		10, 30	
MACHINE GENERAL FEATURES					
Machine Dimension	mm/inch	4400 x 1850 x 1400 (h)	173 ¹⁵ / ₆₄ '' x 72 ⁵² / ₆₄ '' x 55 ¹ / ₈ ''(h)	4800 x 2050 x 1400 (h)	188 ³¹ / ₃₂ '' x 80 ⁴⁵ / ₆₄ '' x 55 ¹ / ₈ ''(h)
Vertical Jaw Length	mm/inch	850	33 ¹⁵ / ₃₂ ''	950	37 ¹³ / ₃₂ ''
Capacity (Depends On Product Dimension)	PKG/min.	30 (Max.)		20 (Max.)	
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G		380 Volt - 50/60 Hz - 3P+1N+1G	
Power	kW	4		4	
Power (Incl. Heat Tunnel)	kW	17		20	
Max. Jaw Height	mm/inch	180	7 ³ / ₃₂ ''	180	7 ³ / ₃₂ ''

* 208 Volt, 380 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)