


# COMPA SERIES

FOOD & BEVERAGES - PERSONAL CARE - INDUSTRIAL & HOUSEHOLD - MANUFACTURING INDUSTRY - LOGISTICS - HEALTHCARE - BAKERY  
 CERAMIC INDUSTRY - AUTOMOTIVE - CONSUMER GOODS

Ask for details

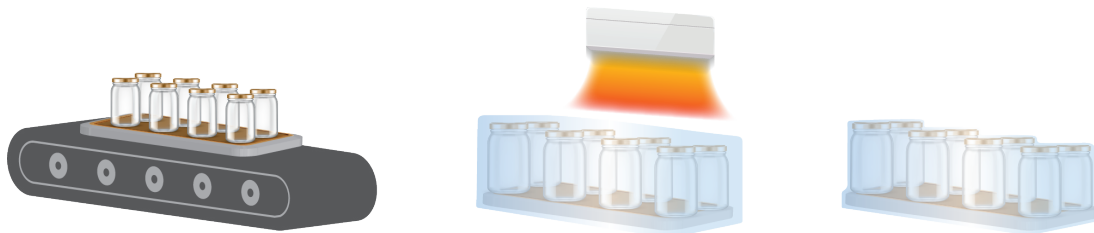

POF SHRINK SERIES

## TECHNICAL FEATURES

PRODUCT TO WRAP SIZES		COMPA 400		COMPA 500	
Max. Height (H)	mm/inch	150	5 <sup>29</sup> / <sub>32</sub> ''	150	5 <sup>29</sup> / <sub>32</sub> ''
Max. Dimensions (L x W x H)	mm/inch	450 x 400 x 150	17 <sup>23</sup> / <sub>32</sub> '' x 15 <sup>3</sup> / <sub>4</sub> '' x 5 <sup>29</sup> / <sub>32</sub> ''	600 x 500 x 150	23 <sup>5</sup> / <sub>8</sub> '' x 19 <sup>11</sup> / <sub>16</sub> '' x 5 <sup>29</sup> / <sub>32</sub> ''
FILM FEATURES					
Max. Width	mm/inch	600	23 <sup>5</sup> / <sub>8</sub> ''	700	27 <sup>7</sup> / <sub>16</sub> ''
Max. Diameter	mm/inch	Ø 30	1 <sup>3</sup> / <sub>16</sub> ''	Ø 30	1 <sup>3</sup> / <sub>16</sub> ''
Recommended Thickness	micron	10, 30 / 15, 25 PVC		10, 30 / 15, 25 PVC	
MACHINE GENERAL FEATURES					
Machine Dimension	mm/inch	2730 x 900 x 1400 (h)	107 <sup>31</sup> / <sub>64</sub> '' x 35 <sup>7</sup> / <sub>16</sub> '' x 55 <sup>1</sup> / <sub>8</sub> '' (h)	2830 x 1000 x 1400 (h)	111 <sup>27</sup> / <sub>64</sub> '' x 39 <sup>3</sup> / <sub>8</sub> '' x 55 <sup>1</sup> / <sub>8</sub> '' (h)
Vertical Jaw Length	mm/inch	540 x 500	21 <sup>17</sup> / <sub>64</sub> '' x 19 <sup>11</sup> / <sub>16</sub> ''	650 x 550	25 <sup>19</sup> / <sub>32</sub> '' x 21 <sup>21</sup> / <sub>32</sub> ''
Capacity (Depends On Product Dimension)	PKG/min.	15 (Max.)		10 (Max.)	
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G		380 Volt - 50/60 Hz - 3P+1N+1G	
Power	kW	1,5		1,5	
Power (Incl. Heat Tunnel)	kW	11,5		14	
Max. Jaw Height	mm/inch	200	7 <sup>7</sup> / <sub>8</sub> ''	200	7 <sup>7</sup> / <sub>8</sub> ''

\* 208 Volt, 380 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)

