


UNIQA SERIES

FOOD & BEVERAGES - PERSONAL CARE - INDUSTRIAL & HOUSEHOLD - MANUFACTURING INDUSTRY - LOGISTICS - HEALTHCARE - BAKERY
CERAMIC INDUSTRY - AUTOMOTIVE - CONSUMER GOODS

Ask for details

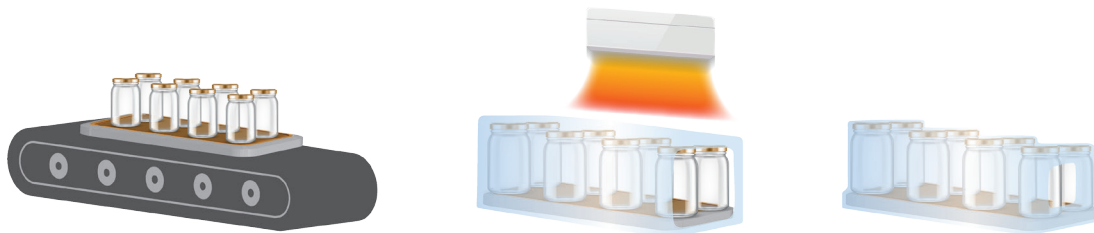

PE SHRINK SERIES

TECHNICAL FEATURES

PRODUCT TO WRAP SIZES		UNIQA 4085		UNIQA 4095	
Max. Height (H)	mm/inch	300	11 ¹³ / ₁₆ ''	300	11 ¹³ / ₁₆ ''
Max. Dimensions (L x W x H)	mm/inch	600 x 750 x 300	23 ⁵ / ₈ '' x 29 ¹⁷ / ₃₂ '' x 11 ¹³ / ₁₆ ''	600 x 900 x 300	23 ⁵ / ₈ '' x 35 ⁷ / ₁₆ '' x 11 ¹³ / ₁₆ ''
FILM FEATURES					
Max. Width	mm/inch	800	31 ¹ / ₂ ''	900	35 ⁷ / ₁₆ ''
Max. Diameter	mm/inch	Ø 30	1 ³ / ₁₆ ''	Ø 30	1 ³ / ₁₆ ''
Recommended Thickness	micron	20, 100		20, 100	
MACHINE GENERAL FEATURES					
Machine Dimension	mm/inch	4240 x 1700 x 2100 (h)	166 ⁵⁹ / ₆₄ '' x 66 ⁵⁹ / ₆₄ '' x 82 ⁴³ / ₆₄ '' (h)	4240 x 1850 x 2100 (h)	166 ⁵⁹ / ₆₄ '' x 72 ²³ / ₆₄ '' x 82 ⁴³ / ₆₄ '' (h)
Vertical Jaw Length	mm/inch	850	33 ¹⁵ / ₃₂ ''	950	37 ¹³ / ₃₂ ''
Capacity (Depends On Product Dimension)	PKG/min.	15 (Max.)		12 (Max.)	
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G		380 Volt - 50/60 Hz - 3P+1N+1G	
Power	kW	3		3,5	
Power (Incl. Heat Tunnel)	kW	31		34,5	
Max. Jaw Height	mm/inch	350	13 ²⁵ / ₃₂ ''	350	13 ²⁵ / ₃₂ ''

* 208 Volt, 380 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)