


UNIQA SERIES

FOOD & BEVERAGES - PERSONAL CARE - INDUSTRIAL & HOUSEHOLD - MANUFACTURING INDUSTRY - LOGISTICS - HEALTHCARE - BAKERY
 CERAMIC INDUSTRY - AUTOMOTIVE - CONSUMER GOODS

Ask for details



PE SHRINK SERIES

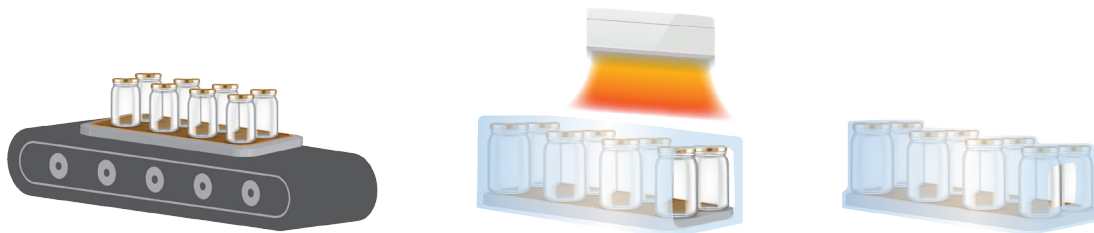

TECHNICAL FEATURES

PRODUCT TO WRAP SIZES

UNIQA 4075

Max. Height (H)	mm/inch	300	11 ¹³ / ₁₆ ''
Max. Dimensions (L x W x H)	mm/inch	600 x 550 x 300	23 ⁵ / ₈ '' x 21 ²¹ / ₃₂ '' x 11 ¹³ / ₁₆ ''

FILM FEATURES

Max. Width	mm/inch	700	27 ⁷ / ₁₆ ''
Max. Diameter	mm/inch	Ø 30	1 ³ / ₁₆ ''
Recommended Thickness	micron	20, 100	

MACHINE GENERAL FEATURES

Machine Dimension	mm/inch	4240 x 1450 x 2100 (h)	166 ⁵⁹ / ₆₄ '' x 57 ³ / ₃₂ '' x 82 ⁴³ / ₆₄ '' (h)
Vertical Jaw Length	mm/inch	750	29 ¹⁷ / ₃₂ ''
Capacity (Depends On Product Dimension)	PKG/min.	20 (Max.)	
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G	
Power	kW	2	
Power (Incl. Heat Tunnel)	kW	28	
Max. Jaw Height	mm/inch	350	13 ²⁵ / ₃₂ ''

* 208 Volt, 380 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)

