


FLEXIA SERIES

FOOD & BEVERAGES - PERSONAL CARE - INDUSTRIAL & HOUSEHOLD - MANUFACTURING INDUSTRY - LOGISTICS - HEALTHCARE - BAKERY
CERAMIC INDUSTRY - AUTOMOTIVE - CONSUMER GOODS

Ask for details



PE SHRINK SERIES

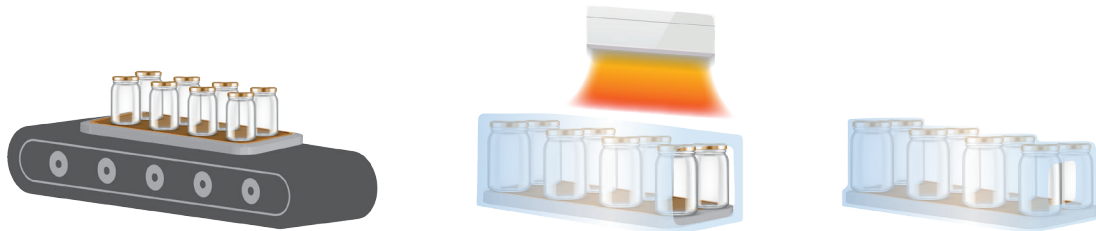

TECHNICAL FEATURES

| PRODUCT TO WRAP SIZES | | FLEXIA 4075 | | FLEXIA 4085 | |
|---|-----------|--------------------------------|---|--------------------------------|---|
| Max. Height (H) | mm/inch | 300 | 11 ¹³ / ₁₆ '' | 300 | 11 ¹³ / ₁₆ '' |
| Max. Dimensions (L x W x H) | mm/inch | 600 x 550 x 300 | 23 ⁵ / ₈ '' x 21 ²¹ / ₃₂ '' x 11 ¹³ / ₁₆ '' | 600 x 750 x 300 | 23 ⁵ / ₈ '' x 29 ¹⁷ / ₃₂ '' x 11 ¹³ / ₁₆ '' |
| FILM FEATURES | | | | | |
| Max. Width | mm/inch | 700 | 27 ⁹ / ₁₆ '' | 800 | 31 ¹ / ₂ '' |
| Max. Diameter | mm/inch | Ø 30 | 1 ³ / ₁₆ '' | Ø 30 | 1 ³ / ₁₆ '' |
| Recommended Thickness | micron | 20, 100 | | 20, 100 | |
| MACHINE GENERAL FEATURES | | | | | |
| Machine Dimension | mm/inch | 3200 x 1150 x 1950 (h) | 125 ⁶³ / ₆₄ '' x 45 ⁹ / ₃₂ '' x 76 ⁴⁹ / ₆₄ '' (h) | 3200 x 1250 x 1950 (h) | 125 ⁶³ / ₆₄ '' x 49 ⁷ / ₃₂ '' x 76 ⁴⁹ / ₆₄ '' (h) |
| Vertical Jaw Length | mm/inch | 750 | 29 ¹⁷ / ₃₂ '' | 850 | 33 ¹⁵ / ₃₂ '' |
| Capacity (Depends On Product Dimension) | PKG/min. | 10 (Max.) | | 10 (Max.) | |
| *Electric Supply | Volt - Hz | 380 Volt - 50/60 Hz - 3P+1N+1G | | 380 Volt - 50/60 Hz - 3P+1N+1G | |
| Power | kW | 1,5 | | 1,5 | |
| Power (Incl. Heat Tunnel) | kW | 16,5 | | 19,5 | |
| Max. Jaw Height | mm/inch | 350 | 13 ²⁵ / ₃₂ '' | 350 | 13 ²⁵ / ₃₂ '' |

* 208 Volt, 380 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)

