


FLEXIA SERIES

FOOD & BEVERAGES - PERSONAL CARE - INDUSTRIAL & HOUSEHOLD - MANUFACTURING INDUSTRY - LOGISTICS - HEALTHCARE - BAKERY
 CERAMIC INDUSTRY - AUTOMOTIVE - CONSUMER GOODS

Ask for details

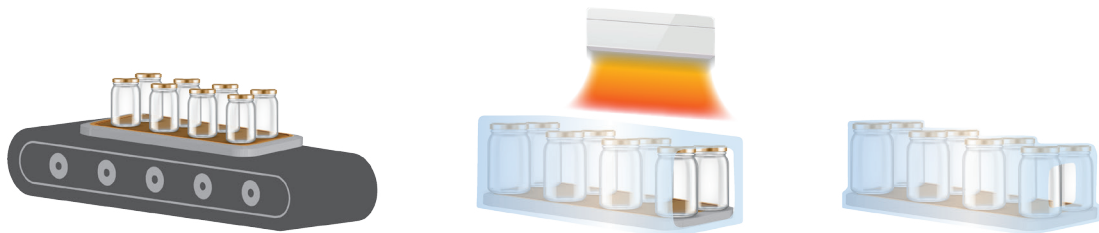

PE SHRINK SERIES

TECHNICAL FEATURES

PRODUCT TO WRAP SIZES

FLEXIA 4095

Max. Height (H)	mm/inch	300	11 ¹³ / ₁₆ ''
Max. Dimensions (L x W x H)	mm/inch	600 x 900 x 300	23 ⁵ / ₈ '' x 35 ⁷ / ₁₆ '' x 11 ¹³ / ₁₆ ''

FILM FEATURES

Max. Width	mm/inch	800	31 ¹ / ₂ ''
Max. Diameter	mm/inch	Ø 30	1 ³ / ₁₆ ''
Recommended Thickness	micron	20, 100	

MACHINE GENERAL FEATURES

Machine Dimension	mm/inch	3200 x 1400 x 1950 (h)	125 ⁶³ / ₆₄ '' x 55 ¹ / ₈ '' x 76 ⁴⁹ / ₆₄ '' (h)
Vertical Jaw Length	mm/inch	950	37 ¹³ / ₃₂ ''
Capacity (Depends On Product Dimension)	PKG/min.	8 (Max.)	
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G	
Power	kW	1,5	
Power (Incl. Heat Tunnel)	kW	19,5	
Max. Jaw Height	mm/inch	350	13 ²⁵ / ₃₂ ''

* 208 Volt, 380 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)