


NOUVA SERIES

FOOD & BEVERAGES - PERSONAL CARE - INDUSTRIAL & HOUSEHOLD - MANUFACTURING INDUSTRY - LOGISTICS - HEALTHCARE - BAKERY
 CERAMIC INDUSTRY - AUTOMOTIVE - CONSUMER GOODS

Ask for details

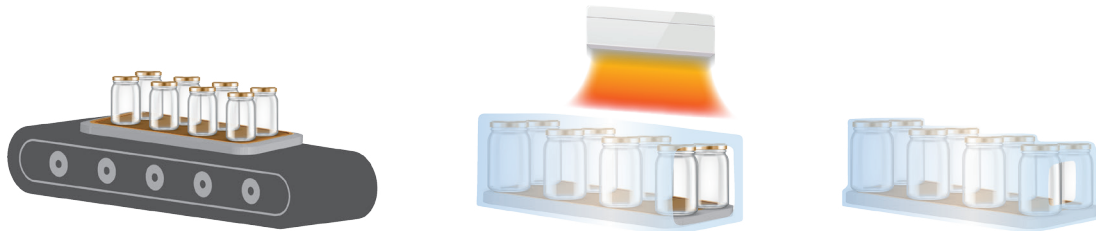

PE SHRINK SERIES

TECHNICAL FEATURES

PRODUCT TO WRAP SIZES

NOUVA 4065

Max. Height (H)	mm/inch	200	7 ⁷ / ₈ "
Max. Dimensions (L x W x H)	mm/inch	300 x 500 x 200	11 ¹³ / ₁₆ " x 19 ¹¹ / ₁₆ " x 7 ⁷ / ₈ "

FILM FEATURES

Max. Width	mm/inch	600	23 ⁵ / ₈ "
Max. Diameter	mm/inch	Ø 30	1 ³ / ₁₆ "
Recommended Thickness	micron	20, 100	

MACHINE

GENERAL FEATURES

Machine Dimension	mm/inch	3800 x 2550 x 2000 (h)	149 ³⁹ / ₆₄ " x 100 ²⁵ / ₆₄ " x 78 ⁴⁷ / ₆₄ " (h)
Vertical Jaw Length	mm/inch	650	25 ¹⁹ / ₃₂ "
Capacity (Depends On Product Dimension)	PKG/min.	12 (Max.)	
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G	
Power	kW	4	
Power (Incl. Heat Tunnel)	kW	19	
Max. Jaw Height	mm/inch	200	7 ⁷ / ₈ "

* 208 Volt, 380 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)

