


# WRAPTOR 1500 / 1650 H:2200

PALLETS - BOXES

VERTICAL STRETCH FILM SERIES

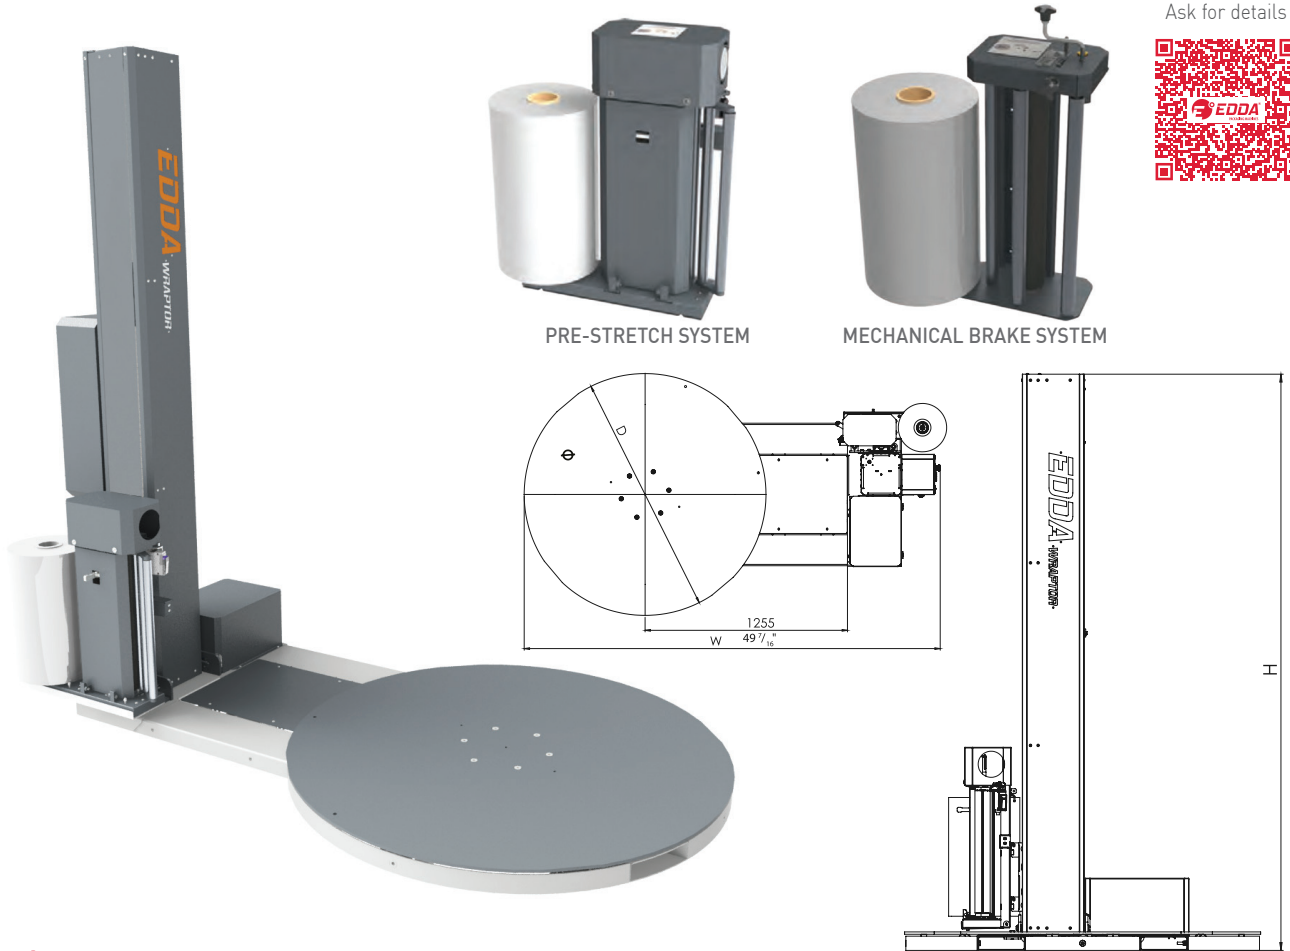

Ask for details



## TECHNICAL FEATURES

| MACHINE GENERAL FEATURES |           | WRAPTOR 1500 MB 2200          |                                   | WRAPTOR 1500 VPT 2200         |                                   | WRAPTOR 1650 MB 2200          |                                   | WRAPTOR 1650 VPT 2200         |                                   |
|--------------------------|-----------|-------------------------------|-----------------------------------|-------------------------------|-----------------------------------|-------------------------------|-----------------------------------|-------------------------------|-----------------------------------|
| Table Diameter           | mm/inch   | Ø 1500                        | 59 <sup>1</sup> / <sub>16</sub> " | Ø 1500                        | 59 <sup>1</sup> / <sub>16</sub> " | Ø 1650                        | 64 <sup>6</sup> / <sub>64</sub> " | Ø 1650                        | 64 <sup>6</sup> / <sub>64</sub> " |
| Table Turning Speed      | rpm       | 4 - 12                        |                                   | 4 - 12                        |                                   | 2 - 10                        |                                   | 2 - 10                        |                                   |
| Forklift Lifting Place   |           | Front                         |                                   | Front                         |                                   | Front                         |                                   | Front                         |                                   |
| *Electric Supply         | Volt - Hz | 220 Volt - 50/60 Hz Monophase |                                   | 220 Volt - 50/60 Hz Monophase |                                   | 220 Volt - 50/60 Hz Monophase |                                   | 220 Volt - 50/60 Hz Monophase |                                   |
| Total Power              | kW        | 0,8                           |                                   | 1                             |                                   | 0,8                           |                                   | 1                             |                                   |
| Tensioning System        |           | Mechanical Brake              |                                   | Motorized Pre-Stretching      |                                   | Mechanical Brake              |                                   | Motorized Pre-Stretching      |                                   |
| Tensioning Rate          | [%]       | 0 - 100                       |                                   | 0 - 250                       |                                   | 0 - 100                       |                                   | 0 - 250                       |                                   |
| Speed Adjustment         |           | Available                     |                                   | Available                     |                                   | Available                     |                                   | Available                     |                                   |

\* 110 Volt 50/60 Hz Monophase (optional)

### FILM ROLL FEATURES

|                     |         |           |  |      |                                    |           |  |      |                                    |
|---------------------|---------|-----------|--|------|------------------------------------|-----------|--|------|------------------------------------|
| Film Width          | mm/inch | 200 - 500 | 7 <sup>7</sup> / <sub>8</sub> " - 19 <sup>11</sup> / <sub>16</sub> " | 500  | 19 <sup>11</sup> / <sub>16</sub> " | 200 - 500 | 7 <sup>7</sup> / <sub>8</sub> " - 19 <sup>11</sup> / <sub>16</sub> " | 500  | 19 <sup>11</sup> / <sub>16</sub> " |
| Max. Roll Diameter  | mm/inch | Ø250      | 9 <sup>27</sup> / <sub>32</sub> "                                    | Ø250 | 9 <sup>27</sup> / <sub>32</sub> "  | Ø250      | 9 <sup>27</sup> / <sub>32</sub> "                                    | Ø250 | 9 <sup>27</sup> / <sub>32</sub> "  |
| Max. Roll Weight    | kg      | 16        |  | 16   |                                    | 16        |  | 16   |                                    |
| Roll Inner Diameter | mm/inch | Ø76       | 2 <sup>63</sup> / <sub>64</sub> "                                    | Ø76  | 2 <sup>63</sup> / <sub>64</sub> "  | Ø76       | 2 <sup>63</sup> / <sub>64</sub> "                                    | Ø76  | 2 <sup>63</sup> / <sub>64</sub> "  |

### PACKAGING PRODUCT DIMENSIONS

|                         |         |             |   |             |   |             |   |             |   |
|-------------------------|---------|-------------|---|-------------|---|-------------|---|-------------|---|
| Max. Dimensions (W x D) | mm/inch | 1200 x 1000 | 47 <sup>1</sup> / <sub>4</sub> " x 39 <sup>3</sup> / <sub>8</sub> " | 1200 x 1000 | 47 <sup>1</sup> / <sub>4</sub> " x 39 <sup>3</sup> / <sub>8</sub> " | 1300 x 1100 | 51 <sup>3</sup> / <sub>16</sub> " x 43 <sup>5</sup> / <sub>16</sub> " | 1300 x 1100 | 51 <sup>3</sup> / <sub>16</sub> " x 43 <sup>5</sup> / <sub>16</sub> " |
| Max. Height             | mm/inch | 2200        | 86 <sup>39</sup> / <sub>64</sub> "                                  | 2200        | 86 <sup>39</sup> / <sub>64</sub> "                                  | 2200        | 86 <sup>39</sup> / <sub>64</sub> "                                    | 2200        | 86 <sup>39</sup> / <sub>64</sub> "                                    |
| Loading Capacity        | kg      | 1500        |   | 1500        |   | 2000        |   | 2000        |   |

### MACHINE DIMENSIONS

|        |         |      |                                     |      |                                     |      |                                     |      |                                     |
|--------|---------|------|-------------------------------------|------|-------------------------------------|------|-------------------------------------|------|-------------------------------------|
| Height | mm/inch | 2430 | 95 <sup>43</sup> / <sub>64</sub> "  | 2430 | 95 <sup>43</sup> / <sub>64</sub> "  | 2430 | 95 <sup>43</sup> / <sub>64</sub> "  | 2430 | 95 <sup>43</sup> / <sub>64</sub> "  |
| Width  | mm/inch | 1500 | 59 <sup>1</sup> / <sub>16</sub> "   | 1500 | 59 <sup>1</sup> / <sub>16</sub> "   | 1650 | 64 <sup>6</sup> / <sub>64</sub> "   | 1650 | 64 <sup>6</sup> / <sub>64</sub> "   |
| Depth  | mm/inch | 2580 | 101 <sup>37</sup> / <sub>64</sub> " | 2580 | 101 <sup>37</sup> / <sub>64</sub> " | 2660 | 104 <sup>23</sup> / <sub>32</sub> " | 2660 | 104 <sup>23</sup> / <sub>32</sub> " |

