
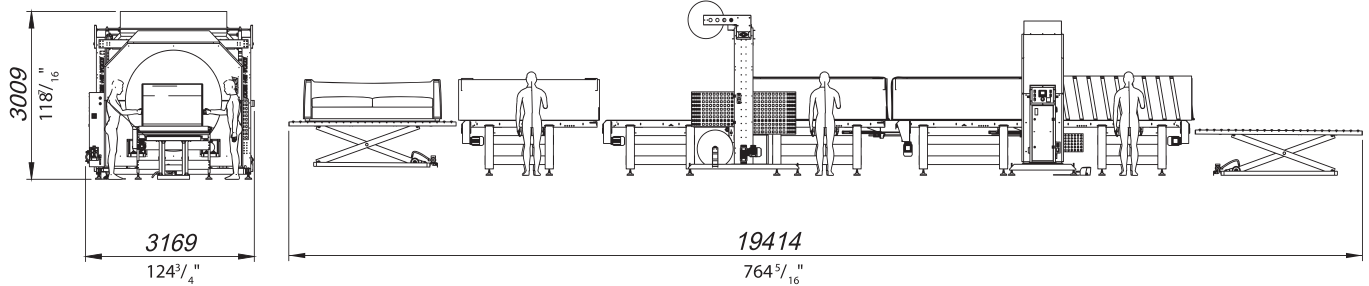


SPINNER 1800 PACKING LINE

SOFAS - PALLETS - BED BASES - BEDROOM AND KITCHEN CABINETS - SANDWICH PANELS - WOOD PANELS - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES - PVC PROFILE PRODUCTS ETC.

Ask for details

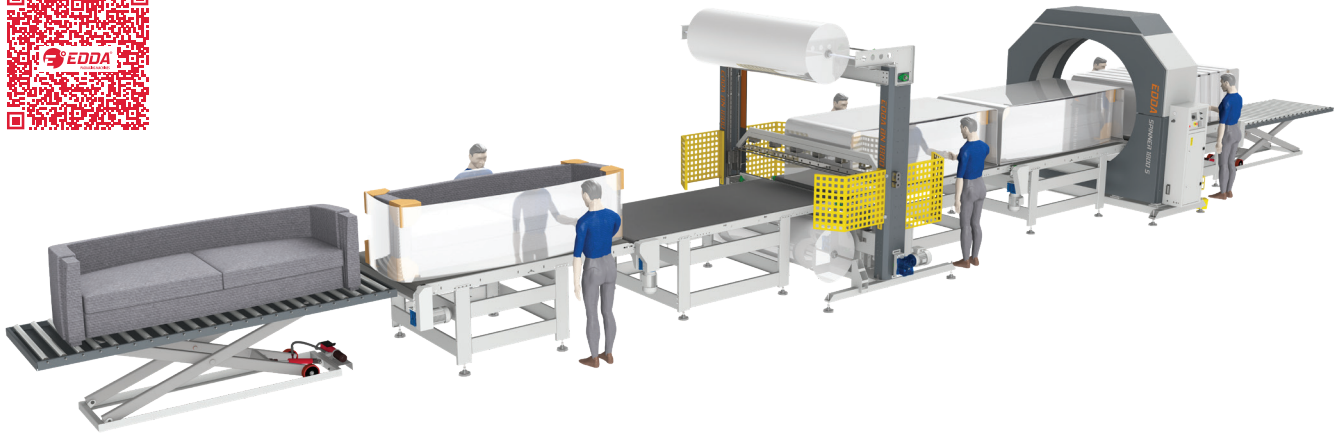

AUTOMATED LINES

TECHNICAL FEATURES

PRODUCT TO TAPE DIMENSIONS

Max. Length		Unlimited	
Min. Dimensions (W x H x L)	mm/inch	700 x 200 x 1200*	27 ⁷ / ₁₆ " x 7 ⁷ / ₈ " x 47 ¹ / ₄ " * With Short Part Nail

CONVEYOR BELT'S FEATURES

Useful Length	mm/inch	2680	105 ³³ / ₆₄ "
Total Length	mm/inch	2910	114 ⁹ / ₁₆ "
Working Height	mm/inch	950	37 ¹³ / ₃₂ "
Electric Motor Power	kW	0,55	
Max. Conveyor Speed	meter/min.	12	
Max. Load Capacity	kgs	100	

STRETCH FILM FEATURES

Max. Width	mm/inch	250	9 ²⁷ / ₃₂ "
Max. Diameter	mm/inch	Ø 230	9 ¹ / ₁₆ "
Reel Core Diameter	mm/inch	Ø 76	2 ⁶³ / ₆₄ "
Recommended Thickness	micron	23, 30, 35	(Max. Weight: 4,5 kg)

AIR BUBBLE FILM UNIT

Max. Film Width	mm/inch	mm/	2000	78 ⁴⁷ / ₆₄ "
Max. Film Reel Diameter		inch	Ø 650	25 ¹⁹ / ₃₂ "
Reel Core Diameter	mm/inch		Ø 20 ~ Ø 76	2 ³ / ₃₂ " ~ 2 ⁶³ / ₆₄ "
Suitable Film Materials			PE Film, PE Air Bubble Film, PE Foam Film, PVC Film	
Cutting System Operating Temperature	°C		50 ~ 150	

MACHINE GENERAL FEATURES

Main Motor Power	kW	3*
Max. Ring Rotation Speed	rpm	50
Min. Ring Rotation Speed	rpm	10
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G
Total Power	kg	5000*

*Depends to machine configuration

* 208 Volt, 380 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)

