


OLYMPIA 100 s BN

MEMBRANE, ACRYLIC AND LACQUER PAINTED COVERS - BATHROOMS AND KITCHEN CABINETS - DOORS - DOOR FRAMES AND MOULDINGS
LAMINATE FLOORING - ALUMINIUM, STEEL AND WOOD PROFILES AND PIPES - PVC PROFILE PRODUCTS ETC.

Ask for details

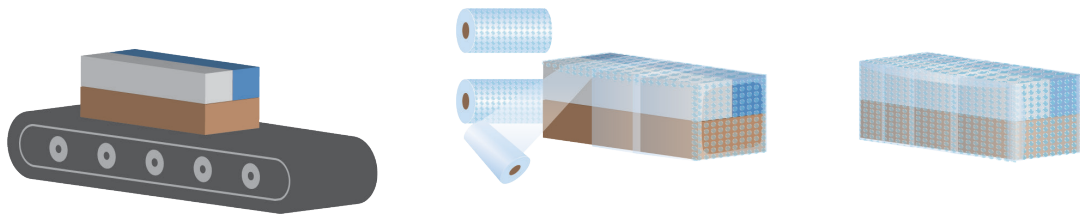

TOTAL CLOSING SERIES

TECHNICAL FEATURES

PRODUCT TO WRAP SIZES

Max. Length		Unlimited		
Min. Dimensions (W x H x L)	mm/inch	100 x 18 x 600*	$3^{15}/_{16}$ '' x $45^{1}/_{64}$ '' x $23^{5}/_{8}$ ''	* With Short Part Nail

CONVEYOR BELT'S FEATURES

Useful Length	mm/inch	1924	$75^{3}/_{4}$ ''
Total Length	mm/inch	2000	$78^{47}/_{64}$ ''
Working Height	mm/inch	915	$36^{1}/_{2}$ ''
Electric Motor Power	kW	0,55	
Max. Conveyor Speed	meter/min.	12	
Max. Load Capacity	kgs/meter	100	

AIR BUBBLE FILM UNIT

Max. Film Width	mm/inch	800	$31^{1}/_{32}$ ''
Max. Film Reel Diameter	mm/inch	Ø600	$23^{5}/_{8}$ ''
Reel Core Diameter	mm/inch	Ø20 - Ø76	$2^{5}/_{32}$ '' ~ $2^{63}/_{64}$ ''
Cutting & Welding System	°C	50 - 150	
Suitable Film Materials		PE Film, PE Air Bubble Film, PVC Film	

STRETCH FILM FEATURES

Max. Width	mm/inch	170	$6^{11}/_{16}$ ''	
Max. Diameter	mm/inch	Ø 230	$9^{1}/_{16}$ ''	(Max. Weight: 3 kg)
Reel Core Diameter	mm/inch	Ø 76	$2^{63}/_{64}$ ''	
Recommended Thickness	micron	23, 30, 35		

MACHINE GENERAL FEATURES

Main Motor Power	kW	1,5	
Max. Ring Rotation Speed	rpm	85	
Min. Ring Rotation Speed	rpm	20	
*Electric Supply	Volt - Hz	380 Volt - 50/60 Hz - 3P+1N+1G	
Total Power	kW	4,2	
Standard Machine Dimensions (W x H x L)	mm/inch	2395 x 2200 x 6350	$94^{19}/_{64}$ '' x $86^{39}/_{64}$ '' x 250''
Total Weight	kg	1600	

* 208 Volt, 415 Volt, 480 Volt 50/60 Hz (optional)